


TURN ON SD

681-001000024550

TURN ON DC WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, sated PMMA opal diffuser beam 90°, light output direct, max. 350mA, IP20



DRAWING

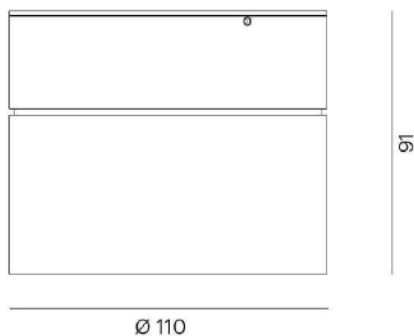


TECHNICAL DETAILS

System perform. [W]	7
Bulb type	LED
Luminous flux [lm]	510
Current sec. [mA]	350
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Light output	direct
Beam angle [°]	90°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Height [mm]	91
Diameter [mm]	110
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,66

LIGHT DISTRIBUTION CURVE

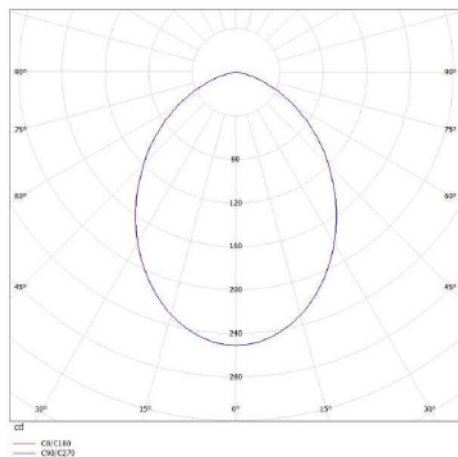

Color lamp	white
RAL	9016
EAN-Number	9008905861451
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	A++-A
No. of luminaires B16A	50

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K.
The values apply to an ambient temperature of 25°C unless otherwise specified.