


FOAM SD

598-110241


FOAM WALL / CEILING LUMINAIRE made of metal, chrome, satined PMMA opal diffuser satined, light output direct, max. 1050mA, IP20



DRAWING

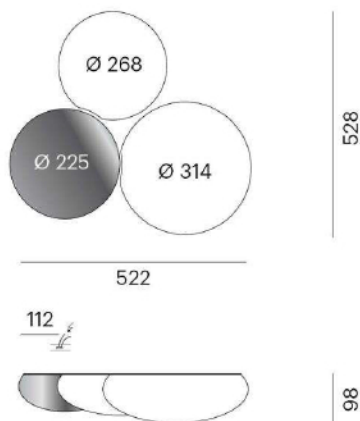

LIGHT DISTRIBUTION CURVE

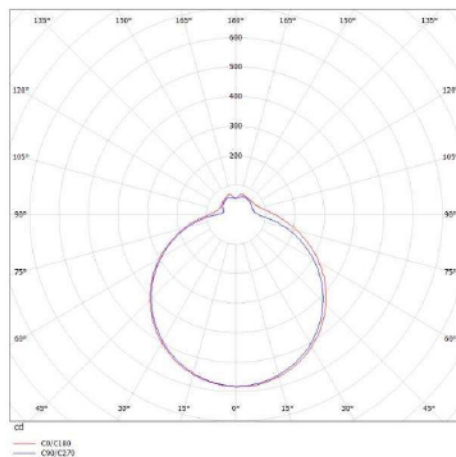

TECHNICAL DETAILS

System perform. [W]	35
Bulb type	LED
Luminous flux [lm]	2400
Current sec. [mA]	1050
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	metal
Length [mm]	522
Width [mm]	528
Height [mm]	98
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	3,04
Color lamp	chrome
Glass color	satined
EAN-Number	9008905732621
Lifetime [h]	50 000 L80 B10

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K.
The values apply to an ambient temperature of 25°C unless otherwise specified.